



FLEXIBLE QUICK CONNECT 4 1/16" 10K PSIG

Data Sheet

GROUND-BREAKER®




i

Introduction

Hydraulic remote operated quick connector is designed to be used during well intervention work, as a connection tool for flexible hoses.

Utilizing the flexible quick connector will reduce several hours of rig up time and increase the HSE significant with less work at height, less pinch point and less work in red zone.

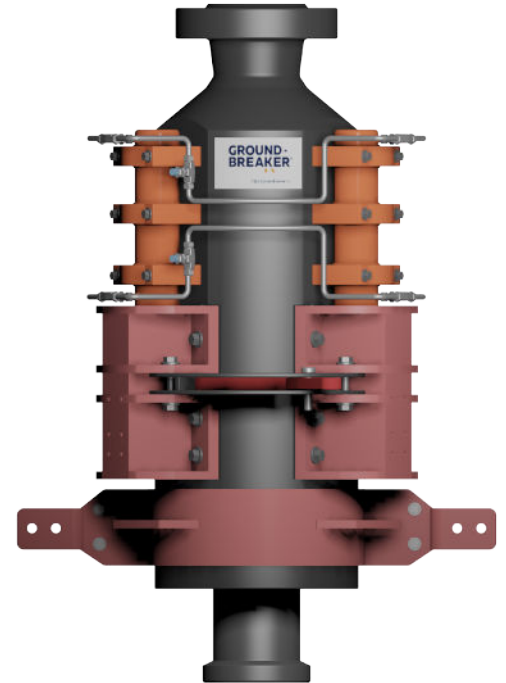

T

Technical Specifications

Upper Connection	:	4 1/16" API Flange
Lower Connection	:	API 6A HUB NO 6
Bore Size	:	4" Full Bore
Nace Compliant	:	Yes
MAWP	:	10 000 PSI
Temp Rating	:	-18 to +121 C°DD-NL
API Material Class	:	PSL3
API Product Spec level	:	PR2F
API Performance level	:	950 Kg
Body Weight	:	150 Kg
Stab Weight	:	1350 MM
Total Length	:	API 6A - ISO 10423
Design Codes	:	DNVGL OS-E101
Approval	:	

C

Contact

Professor Olav
Hanssens vei 7A.
4021, STAVANGER,
Norway
Tel: +47 910 00 374
post@groundbreaker.no

